



Plexiglas® MC Translucent Sign Colors

ACRYLIC SHEET

Throughout developments in lighting - from incandescent through fluorescent, from halogen to neon, and now LED - Plexiglas® MC Translucent Sign Colors have stood the test of time, with a solid history and a vibrant future.

Through the years, Plexiglas® acrylic sheet has delivered the performance you expect, and remains the familiar brand you've known and trusted, right down to our Plexiglas® acrylic sheet color numbers. We're still there for you today.

PLEXIGLAS®
BY ARKEMA

- Wide range of color choices for LED Hiding
- Can position the acrylic face as close as 2" to the light source
- Excellent diffusion characteristics
- Excellent color stability
- Lightweight - Half the weight of glass
- Can be easily fabricated and thermoformed
- Also available in impact grade as Plexiglas® SG PLUS acrylic sheet

ALTUGLAS
INTERNATIONAL
ARKEMA GROUP

Now for
LEDs


Plexiglas® MC Translucent Sign Colors

ACRYLIC SHEET

PLEXIGLAS® MC Translucent Sign Colors for LED Hiding

Plexiglas® MC Translucent acrylic sheet colors diffuse light as it is transmitted, so that objects behind the sheet cannot be clearly distinguished. This diffusion quality is why our translucent colors are an exceptional choice for backlit sign applications using most common light sources - including LEDs. The percent transmission of diffused light is approximately the same, regardless of the sheet thickness. The colors shown have been tested in 0.118" and 0.177" thickness (unless otherwise noted) as close as 2" from the LED light source.

PLEXIGLAS® MC White Translucent Sign Colors for LED Hiding

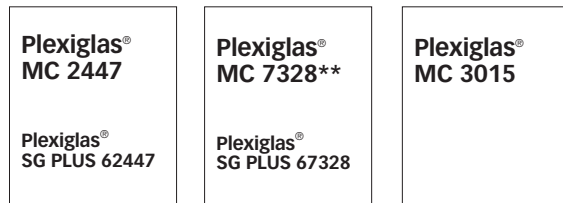

Plexiglas® acrylic sheet has been considered a standard of the industry since it was first introduced more than 75 years ago. Available in additional colors, the Plexiglas® MC series offers an economical acrylic sheet that is both durable and versatile for a variety of other applications as well.

Need an impact product? Check out our Plexiglas® SG PLUS craze-resistant impact acrylic sheet, which is well suited for both channel letter and pan face sign applications.

Our co-extrusion, layering capability will allow for many color options to be developed with specific transmission or diffusing properties. Contact your local Sales Representative for specific details.

Products are available in a variety of sheet sizes.



*Only 0.118" has been tested for LED Hiding capability
 **Only 0.177" has been tested for LED Hiding capability

The colors above were tested with an Agilight Model # AGI-BS-EDGE-DW BrightStripe Edge White LED, 6500K with an I.T.E. Power Supply - Model # GFP451DA-1238-1 I/P:100-240V 50/60 Hz 1.2A, O/P: DC 12V, 3.8A. Actual LEDs are spaced 3/4" apart on-center. Testing was conducted with the light source positioned 2" behind the sheet.

Note: Different results may be achieved when using alternative white or colored LEDs due to equipment differences and/or user subjectivity.

Plexiglas® acrylic plastic is a combustible thermoplastic. Observe fire precautions appropriate for comparable forms of wood and paper. For building uses, check code approvals. Impact resistance is a factor of thickness. Avoid exposure to heat or aromatic solvents. Clean with soap and water. Avoid abrasives.

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Arkema expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information; NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

See MSDS for Health & Safety Considerations.
 Altuglas® and Plexiglas® are registered trademarks of Arkema.
 ©2013 Arkema Inc. All rights reserved.

Distributed by:



Call: 1 (866) 437-7427
 Email: info@polymershapes.com
 www.polymershapes.com