



# MANUFACTURER NEWLIFE MAGNETICS

## MACO MAGNETIC DISPLAY SYETEM SPECIFICATION SHEET

MACO NM PLAIN MAGNET SHEETING


**NMB-PB30**

Edition: A0 NO: NMEQS-MACO 168

### FEATURES AND ADVANTAGES:

- Thin and flexible magnet sheeting, plain, black surface, compatible for laminating with graphics
- Working as magnetism principle on iron or steel surface, easy to apply, remove and change, without residue
- Without demagnetized, anti-rust
- Good weather resistance, excellent for durable indoor display, such as elevator, steel door, car sign.


### CONSTRUCTION DRAWING:

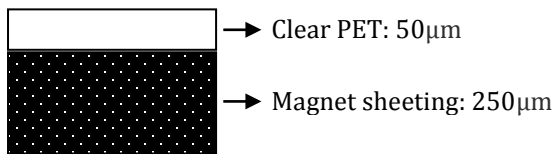

### STANDARD SIZE:

- 30M×1270mm
- 30M×1370mm
- 30M×1524mm

### PACKAGING:

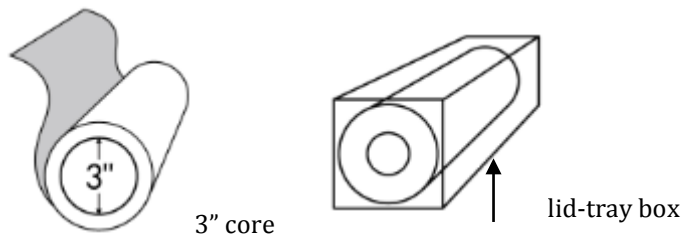

### MAGNETIC DATA:

Pull Strength:  $\geq 9.0$  (g/cm<sup>2</sup>)  
Guass :  $\geq 130$ Gs

### PHYSICAL DATA:

Total thickness	300μm (±30)
Weight	725g/M2 (±70)
Appearance	Black
Opacity	100%
Water resistance	High

### PROCESS AND STORAGE:

- Working condition: temperature 15°C to 30°C, and relative humidity 30% to 60%.
- Application condition: temperature change is within 40°C daily.
- Storage condition: closed preserve avoiding sunlight, in temperature 10°C to 35°C, relative humidity 20% to 70%
- Shelf life: 12 months under storage condition. Unfinished material should be seal-packed.

### NOTICE:

- The laminated side is clear PET side.
- For more information, please get reference from our "User Guide"

Distributed by:



Call: 1 (866) 437-7427  
Email: info@polymershapes.com  
www.polymershapes.com