

JET MIRROR SHEET



GLASS-LIKE CLARITY | LIGHTWEIGHT | FLAME RETARDANT

Virtually unbreakable Jet Mirror* sheet is an excellent, cost-effective choice for reflective surfaces. Made from LEXAN™ polycarbonate, Jet Mirror* sheet is far superior to tempered glass and polished metal. It has a proprietary abrasion resistant coating on one side that provides a high tolerance to scratching. The reverse side has a metalized finish offering exceptionally high reflective values. This combination of high performance properties enables this virtually unbreakable material to weigh less than tempered glass mirrors.

FEATURES

- Made from LEXAN™ polycarbonate providing glass-like clarity
- Easily fabricated
- Surface treated to resist scratches, abrasion and dents
- Highly reflective
- Flame retardant, meets vertical burn requirements
- Easily maintained
- Lightweight
- Virtually unbreakable – high impact strength

APPLICATIONS

- Lavatory mirrors
- Stow bin mirrors
- Decorative panels

Material grade: Mar resistant optical quality polycarbonate mirror, flame retardant FAR 25.853 and UL 94 V-0 rated LEXAN™ sheet

Material color: Clear, Bronze and Gold

Scope: Optical specifications, hard mar resistant, aircraft grade, flame retardant, polycarbonate mirror. Although polycarbonate sheets cannot be manufactured completely without flaws, the use of this document will ensure that only those sheets meeting this specification will be used for JetMirror sheet.

Property	Requirements	Test
1.0 Dimension		
1.1 Gauge tolerance Nominal gauge range Available 0.080", 0.118" Other gauges available upon request	Min. limit/Max limit -10%/+10%	 TMB 2000
1.2 Width tolerance 48"	-0"/+0.5"	TMB 4000
1.3 Length 96"	-0"/+2"	TMB 5000
2.0 Appearance		
Substrate		
2.1 Warpage	Length divided by 100	TMB 1800
2.2 Squareness	500" (Max.)	TMB 2400
2.3 Ripples/distortion Mirror standard	Compared against visual	TMB 2700
2.4 Visual defect 100% visual inspection performed		TMB 3200
A. Black specks, carbon Defect size 0.040"-0.065" 0.032"-0.039" 0.020"-0.031" 0.010-0.019"	Max. defects per sq. ft. 1 3 3 30	TMB 3210
B. Inclusions, bubbles, pits Defect size 0.040"-0.065" 0.032"-0.039" 0.020"-0.031" 0.010-0.019"	Max. defects per sq. ft. 1 3 4 30	TMB 3600
3.0 Mirror		
3.1 Visual defects Visual inspection performed		
A. Aluminum splatter Defect size 0.065"-0.500"	Max. defects per sheet 1 cluster	TMB 4815
B. Voids, white spots Defect size 0.040"-0.065" 0.032"-0.039" 0.020"-0.031" 0.010-0.019"	Max. defects per sq. ft. 1 2 4 8	TMB 4820
C. Protective backing (paint) 1. Thickness 2. Uniformity	1.5 to 2 mils Pass	TMB 4960 TMB 4980

Notes:

- There shall be no black speck clusters of 3 or more above 0.19" in a 1.0" diameter circle.
- Defects will be limited to 20% of the sheet leaving a minimum of 80% usable sheet.
- There shall be no more than 20% of an production run that yields less than 80% usable sheet due to aluminum splatters.

Property	Requirements	Test
4.0 Coating		
4.1 Abrasion taber, haze (100 cycles)	4% max	TMB 2046
4.2 Cost adhesion (scribe)	No coating removed by adhesive tape	TMB 2047
4.3 Visual defects (coating) 100% visual inspection performed		
A. Lint/fibers	Max. defects per sq. ft.	TMB 1059
Width <0.030"		
Length > 0.500"	0	
Length < 0.500"	1	
B. Scratches (mirror coated side)	Max. defects per sq. ft.	TMB 1060
Width < .020"		
Length > 1.0"	0	
Length 0.500"-1.0"	1	
Length 0.250"-0.500"	4	

Notes:

- Random coating sags or minor areas of distortion may occur around defects. If such defects do occur, they will generally be less than 1.0" by 1.0" across and shall not exceed 1 per 25 square feet.
- Inspection of this product must be performed using the test methods indicated. If a defect does not appear using these methods, it will not be considered a defect.

Property	Typical Value	Test method
General		
Specific gravity	1.25	ASTM D792
Water absorption (24 hrs @ 73° F)	0.20%	ASTM 570
Mechanical		
Tensile strength	9,500 psi	ASTM D638
Tensile elongation	95%	ASTM D638
Flexural modulus	370,000 psi	ASTM D790
Flexural strength 1	3,500 psi	ASTM D790
Compressive strength	12,500	ASTM D695
Dynatup impact strength 0.5" dart, @ 73°F	50 ft. -lbs.	ASTM D3783
Izod impact strength		
Notched @ 73°F	2.4 ft. -lbs.	ASTM D256A
Unnotched @ 73°C	NB	
Thermal		
Defection temperature (264 psi)	280°F	ASTM D648
Coefficient of thermal expansion	3.75 x 105 in/in/°F	ASTM D696
Thermal conductivity	1.35 BTU/hr/ft/2/°F/in	ASTM C177
Specific heat @ 77°F	0.3 BTU/lb/°F	
Optical		
Refractive index	1.495	ASTM D542
Light transmission	85-89%	ASTM D1003
Flammability		
UL Flammability	V-0 (90 mil and above) V-2 (34-89 mils)	UL 94
FAA Flammability ATS 1000 @ 40 mils to 125 mils	Passes A&B Pass	FAR 25.853

Abrasion Resistance Comparison


Chemical Resistance Comparison

Test Method	Uncoated	Coated	Test Method	Uncoated	Coated
ASTM D1044	Polycarbonate	JetMirror	ANSIZ26.1	Polycarbonate	JetMirror
Taber abrader 500g	% Haze @ 100 cycles				
Load CS- 10F wheels	> 15.0	< 4.0	Crazing	Fail	Pass

We are committed to shaping your success!

Polymershapes is the premier distributor of plastic sheet, rod, tube, film, and associated products, with over 70 years of industry-leading heritage. We have the industry's most knowledgeable and highly trained sales and customer service team. Our network of 80+ stocking facilities, located throughout the United States, Canada, Mexico and Chile, enables our customers access to extensive local inventory from world-class supplier partners, and we can provide same-day delivery in many locations.

- Expert conversion capabilities including cut-to-size sheets, film conversion and CNC routing and machining
- Innovative solutions for your material requirements and applications
- An easy, seamless experience – consistent, accurate, with integrity

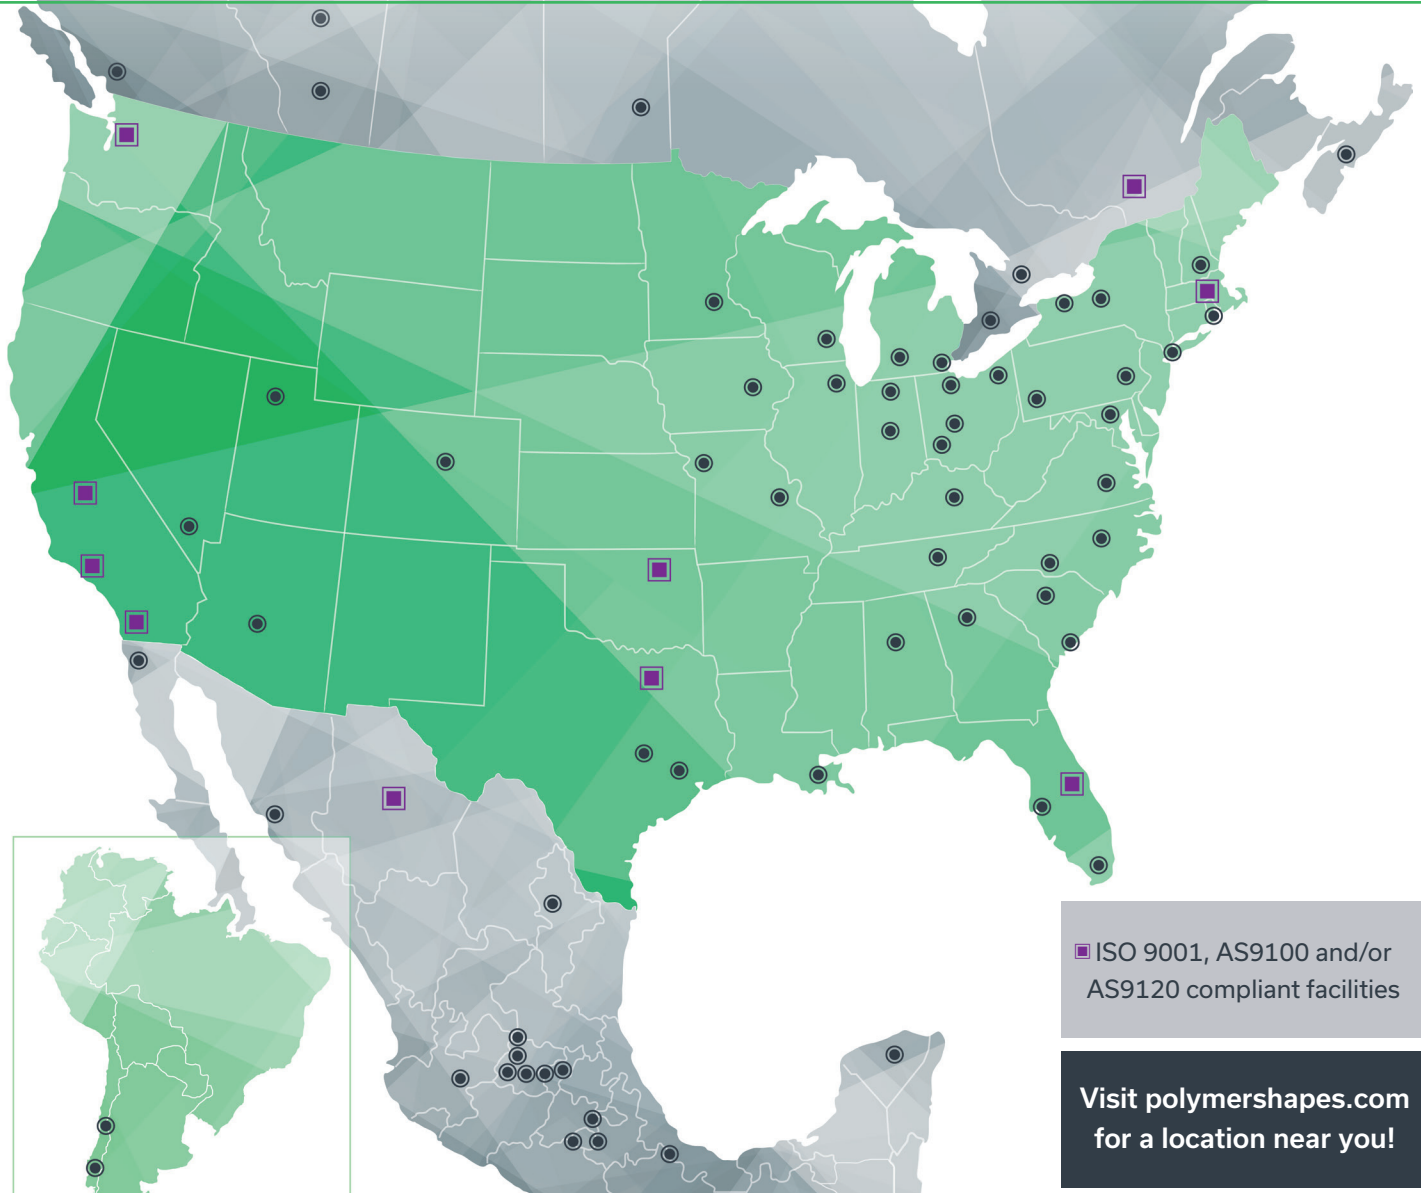

Contact us for quotes & availability: info@polymershapes.com

 **Polymershapes**

You're the Center of All We Do
polymershapes.com

The materials, products, and services of Polymershapes LLC, its subsidiaries and affiliates ("Seller") are sold subject to Seller's standard conditions of sale, which can be found at www.polymershapes.com and are available upon request. Although any information or recommendation contained herein is given in good faith, Seller makes no warranty or guarantee, express or implied, (i) that the results described herein will be obtained under end-use conditions, or (ii) as to the effectiveness or safety of any design incorporating seller's products, services or recommendations. Except as provided in Seller's standard conditions of sale, Seller shall not be responsible for any loss resulting from any use of its products or services described herein. Each user is responsible for making its own determination as to the suitability of Seller's products, services or recommendations for the user's particular use through appropriate end-use testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. No statement by Seller concerning a possible use of any product, service or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of such product, service or design in a manner that infringes any patent or other intellectual property right. ©2020 Polymershapes LLC. All rights reserved.